



ST120 120 lb (55 kg)

Tumble Dryers

Our single pocket tumble dryers are designed with fewer moving parts, so that you'll face fewer maintenance problems and less wear and tear. We make it easier with a large, easy-to-clean lint compartment and a heavy-duty door hinge designed to withstand heavy usage.

- High-performance heater box increases energy efficiency, reduces drying times and provides a more comfortable operating environment.
- Precise drying performance with OPT (over-dry prevention technology).
- Consideration of the state of t

- · Large easy-to-clean lint compartment.
- · Reversing option available.
- Quantum[™] gives you complete laundry control to reduce costs and increase throughput.




Quantum® Control

Revolutionary Quantum® technology combines equipment controls, programming and wireless networking into one complete OPL management system, giving you total control over your laundry room from any computer, anywhere in the world. Advanced diagnostics and audit data reports help you catch errors before they become bigger issues. Quantum is designed to help your reduce costs, decrease your downtime and increase your throughput.

Single Tumble Dryer

Specifications

			ST120
Control Option			Quantum
Capacity - lb (kg)			120 (55)
Overall Width - in (mm)			46.1 (1170)
Overall Depth - in (mm)			67.9 (1725)
Overall Height - in (mm)			85.7 (2175)
Cylinder Diameter - in (mm)			44 (1120)
Cylinder Depth - in (mm)			41 (1040)
Cylinder Volume - cu. ft (liters)			36.1 (1020)
Door Opening Siz	26.9 (683)		
Energy Data Gas Models - Per Pocket			270,000 Btu/hr
Steam Models - Per Pocket			334,750 Btu/hr
Electric Models			60kW
Gas Connections* - in (npt)			1
Plumbing Connections - Steam - in (npt)			0.75
Air Outlet - in (mm)			10 (254)
Motor - HP Fan			1.5
		Cylinder	1.5
Airflow - cfm			1400 (660)
Electrical	Gas	& Steam	
Specs - amps	Q	200-240V/50/60/3	7
	N	440-480V/50/60/3	4
	Elec	tric	
	G	230-240V/50/60/3	147
	L	460-480V/50/60/3	75
Shipping Dimensions Width Approx in (mm)			48 (1220)
Approx III (IIIIII)		Depth	71.5 (1820)
Height			90 (2290)
Net Weight - lb (kg) Gas			1220 (555)
Electric			1250 (565)
Steam			1330 (605)
Shipping Weight - lb (kg) Gas			1290 (585)
Electric			1320 (600)
	1400 (635)		
Agency Approval	CSA		

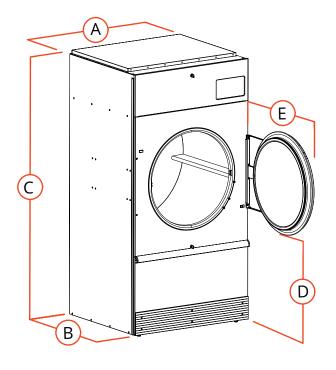

A.	Overall Width - in (mm)	46.1 (1170)
В.	Overall Depth - in (mm)	67.9 (1725)
C.	Overall Height - in (mm)	85.7 (2175)
D.	Door Bottom to Floor - in (mm)	31.4 (800)
E.	Door Swing - in (mm)	32.5 (825)

Tumble dryer models are made to suit a variety of electrical service characteristics. See your Speed Queen distributor for specifications.

For further details on installation, refer to Installation, Operation and Maintenance instructions supplied with the tumble dryer. Amperage ratings available in Installation Manual.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.

 $[\]mbox{\ensuremath{^{\pm}}}\ \mbox{\ensuremath{^{LP}}}\ \mbox{\ensuremath{^{gas}}}\ \mbox{\ensuremath{^{available}}}\ \mbox{\ensuremath{^{formal}}}\ \mbox{\ensuremath{^{ch}}}\ \mbox{\e$